

Storage reagents


Chemical resistance

Supports agitators

Volume up to 1200 L

Embedded graduate

Screw cap

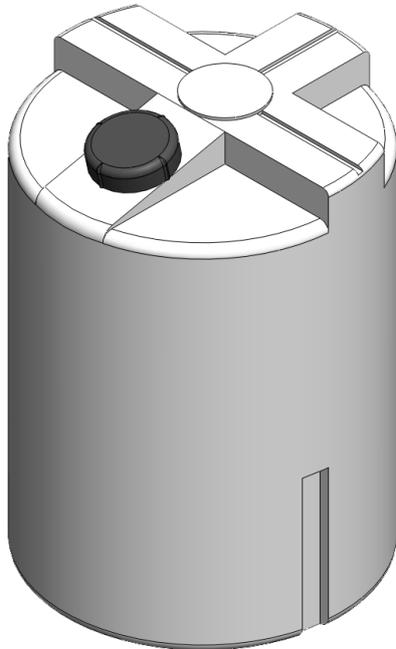

Colberge DP



The deposits of the DP series, constructed by rotomolding process in high-density polyethylene, are designed to meet all requirements related to preparation, storage and dosage of reagents for the treatment of water.

Available in a range that covers from small units for use in private swimming pools and chemical treatments, to volumes that meet the needs of ETAs and ETARs public and industry.

Technical features

- Mechanical and chemical resistance;
- Embedded graduate;
- Translucent for easy reading of the level (Option: opaque, blue or black); ;
- Side deflectors;
- Transverse reinforced shoulders, designed for mounting of dosing pumps;
- Prepared top entrance for agitator;
- Entry installed on top oblique;
- Screw cap for total sealing;
- Screw output for discharge valve.

Views / Dimensions

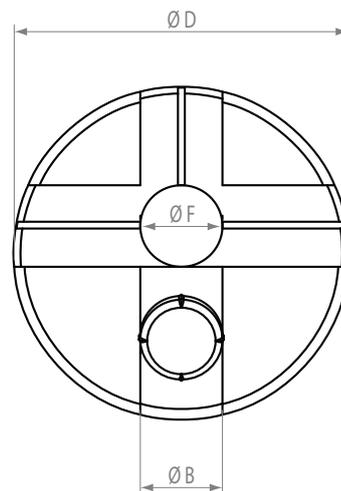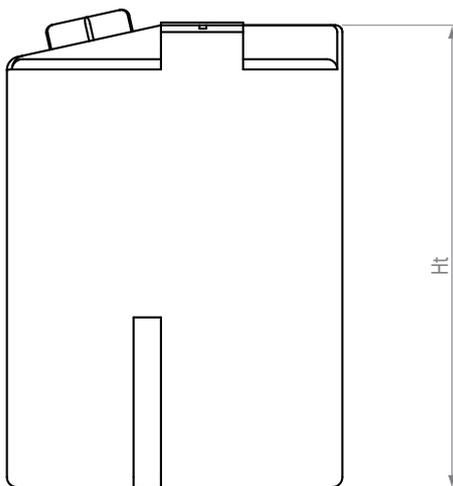

| DP Series | Model | Volume | Height | Diameter | Ø F | Ø B | Weight |
|-----------|--------|--------|---------|----------|-----|-----|--------|
| | | liters | (Ht) mm | (Ø D) mm | mm | mm | kg |
| | DP100 | 100 | 680 | 490 | 140 | 130 | 6 |
| | DP200 | 200 | 980 | 550 | 160 | 130 | 9 |
| | DP500 | 500 | 1280 | 740 | 220 | 220 | 18 |
| | DP1200 | 1200 | 1500 | 1060 | 220 | 220 | 35 |

DP-GB DC280109