

Flexible
dimensions

HDPE

Screw cap

Volume
up
30 m³

Mechanical
resistance

Several
options

Colberge TR

The deposits of the TR series are constructed by winding sheet in high-density polyethylene or polypropylene and are designed for the storage of raw water, consumption, demineralized or osmosis as well as for applications in domestic sewage, municipal or industrial.

The size of the TR series was developed and conducted according to standard German DSV. Its use is intended only for the storage of water, not taking any type of chemical. It is not advisable to install the deposit in areas with direct exposure to the sun. The installation must be carried out in completely flat surfaces and sustained.


Available in a range that covers from small units for household applications to volumes that meet the public needs and industry.

Technical features


- Good mechanical resistance inherent to the materials used in their manufacture;
- Closed with conical roof;
- Port of man with screw cap;
- Outlets for sewage and transhipment.

Options

- Outside level with / without sensors;
- Exterior ladder access to top;
- Other outlets on request.

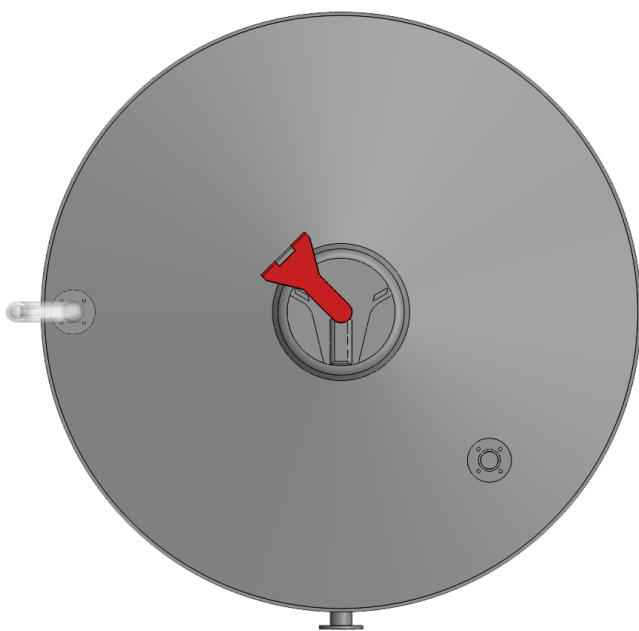

Views / Dimensions

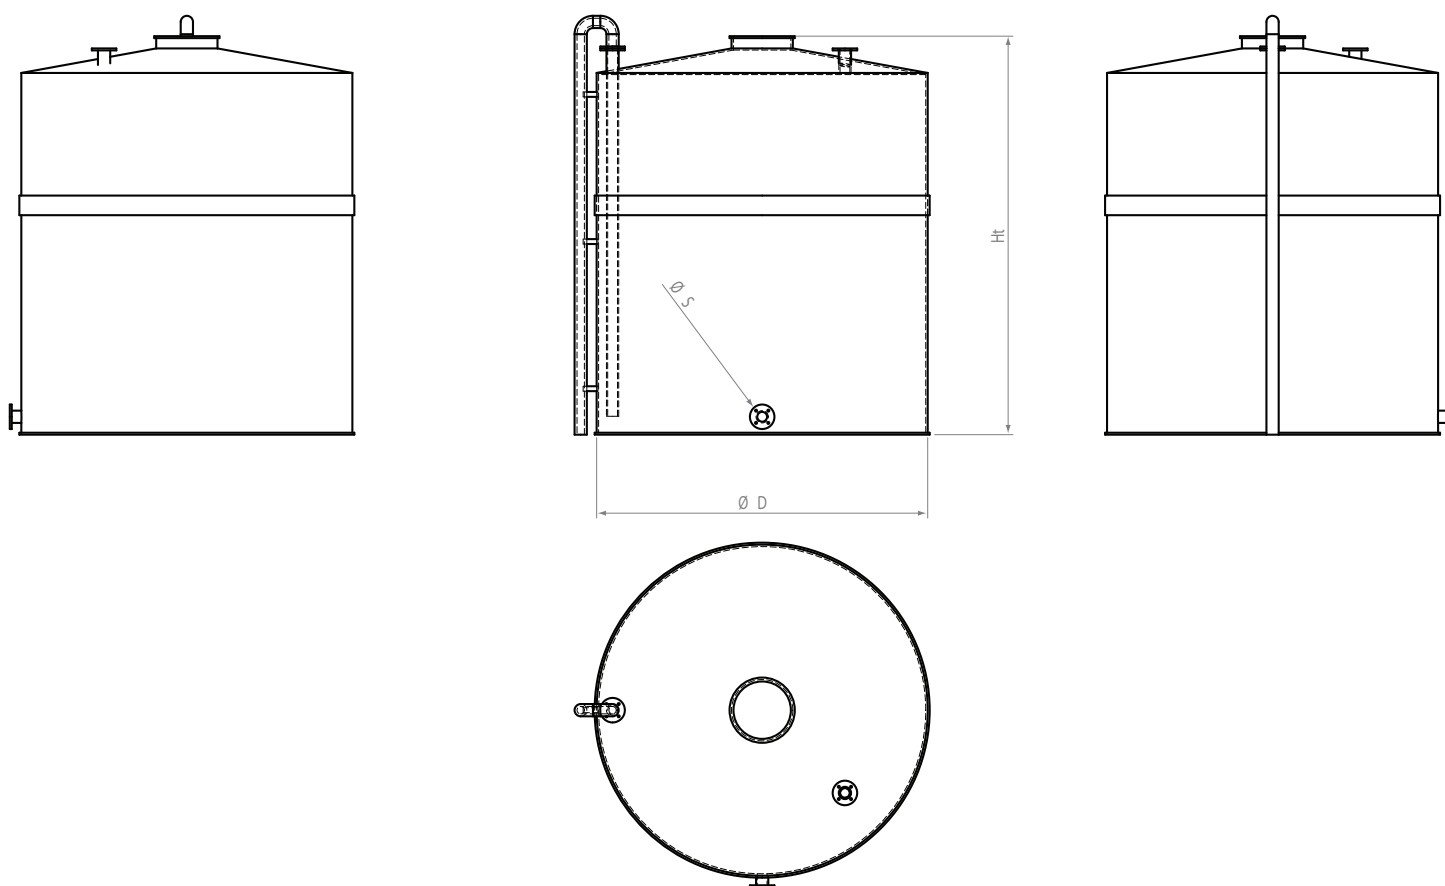

TR Series	Model	Volume	Height	Diameter	Output
		Liters	Ht mm	Ø D mm	Ø S mm
	TR025	2000	2000	1300	DN50
	TR035	3500	2000	1600	DN65
	TR050	5000	2000	1800	DN65
	TR065	6500	2300	2000	DN65
	TR085	8500	3000	2000	DN80
	TR100	10000	3000	2100	DN80
	TR125	12500	3000	2400	DN80
	TR150	15000	3000	2600	DN100
	TR200	20000	3000	3000	DN100

TR-GB DC280109