

# General Specifications

Model SX42  
2-electrode Conductivity sensor  
for high temperature

*These high temperature conductivity sensors have a stainless steel body and a ceramic insulation, especially designed to withstand high temperatures and pressures. A special treatment of the electrodes ensures optimal resistance against polarisation.*

*The conductivity cells have extremely high temperature and pressure ratings: the threaded types can handle 16 bar at 200°C and the flanged types can handle 40 bar at 250°C.*


*The combination of the sensor plug and cable is watertight and can handle temperatures upto 100°C. The aluminium connection box of the flanged types has been selected to have a easy connection with high temperature cabling.*

## Features


- High temperature and pressure ratings
- Built-in temperature resistor: Pt1000
- High precision of the cell constant
- Fast temperature response
- Plug and cable form a water tight connection to IP65
- Model with flange has an integral connection box
- Threaded models have standardized connections 1" NPT or R1
- Selection of two cell constant 0.1 or 0.01 cm<sup>-1</sup>




## System Configuration




Sensors




Cables



Fittings



Transmitters



Accessories

**Specifications**  
**General Specifications**

**Materials**

- Wetted parts  
 -Body : stainless steel AISI 316  
 -Insulation : ceramic (aluminium oxide)  
 -Electrodes : stainless steel AISI 316  
 -Lance : stainless steel AISI 316
- Electrical connector : PBT reinforced with glass for threaded models or aluminium terminal box for flanged models
- Process connections  
 -Screw-in : R 1 to ISO 7-1 or 1" NPT male  
 -Flange : Flange to DIN2527 Form E DN50 PN64  
 Flange to ANSI B16.5 2" 600 lbs
- Shipping weight  
 -Model : approx. 0.5 kg for SX24-BS or NS  
 : approx. 0.7 kg for SX34-BS or NS  
 : approx. 5.7 kg for SX24-DF,AF or JF  
 : approx. 6.0 kg for SX34-DF,AF or JF
- Shipping dimensions  
 -Threaded models : approx. 27 x 5 x 5 cm  
 -Flanged models : approx. 40 x 20 x 20 cm

**Technical specifications**

- Temperature range : up to 200° C for threaded models (see figure 1)  
 : up to 250° C for flanged models
- Pressure range : up to 16 bar (1.6 MPa) for threaded models (see figure 1)  
 : up to 40 bar (4.0 MPa) for flanged models
- Temperature sensor : Pt1000 to IEC 751
- Cell constant : 0.1 cm<sup>-1</sup> for models SX42-SX24-  
 : 0.01 cm<sup>-1</sup> for models SX42-SX34-
- Measuring principle : 2 electrodes system

**Model and Suffix Codes**

Model Code	Suffix code	Option	Description
SX42		.....	Conductivity cell for high temperature
Cell constant	-SX24	.....	Cell constant 0.1 cm <sup>-1</sup>
	-SX34	.....	Cell constant 0.01 cm <sup>-1</sup>
Process Connection	-BS	.....	ISO 7/1-R 1"
	-NS	.....	1" NPT male
	-DF	.....	DIN flange DN50 PN64
	-AF	.....	ANSI Flange 2" 600 Lbs
Style code	*A	.....	Style A
Certificates		/M.....	Material certificate 3.1 according to EN 10024
		/Q.....	Quality Inspection Certificate

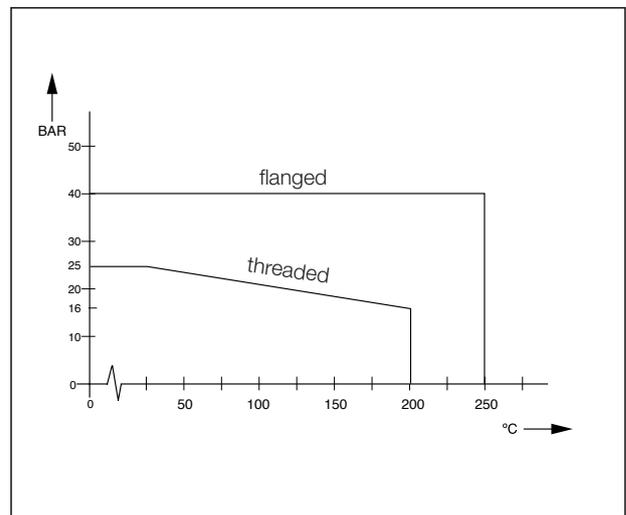


Figure 1. Pressure and temperature diagram

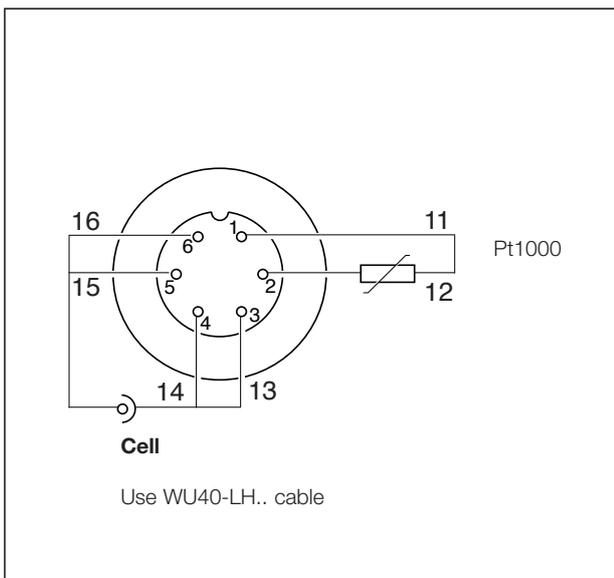


Figure 2. Wiring diagram threaded models

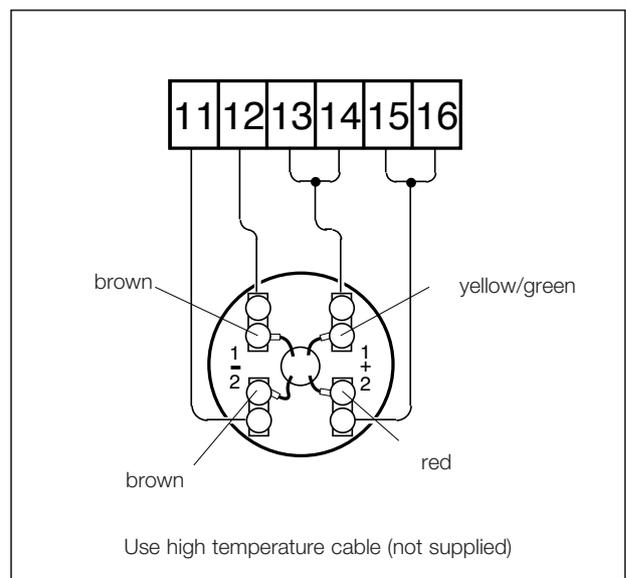


Figure 3. Wiring diagram flanged models

Dimensions

Units: mm (inch)

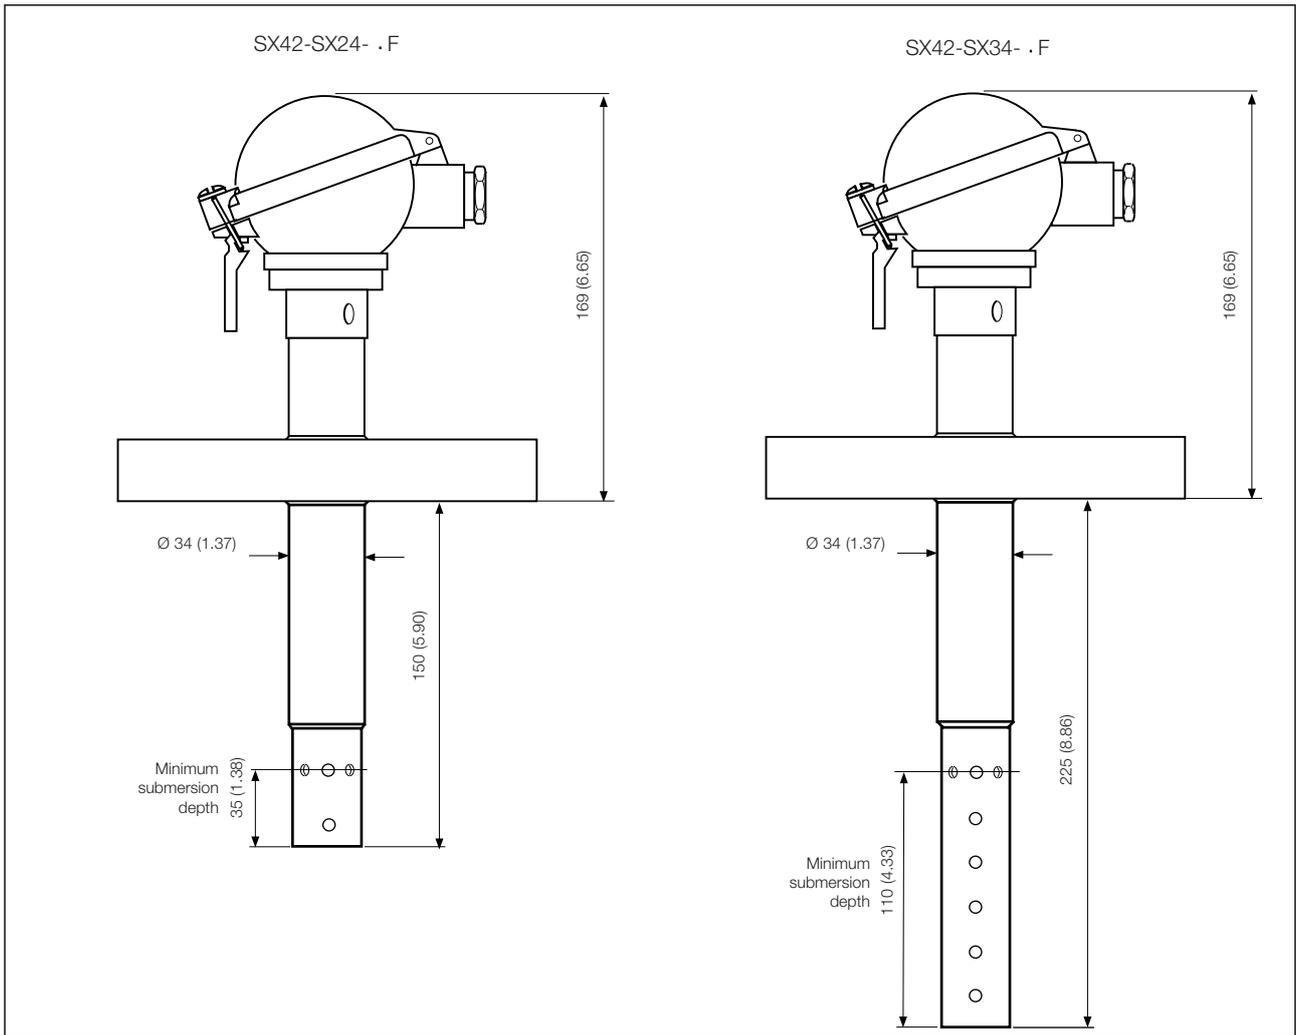


Figure 4. Flanged models (flange dimensions see fig.5)

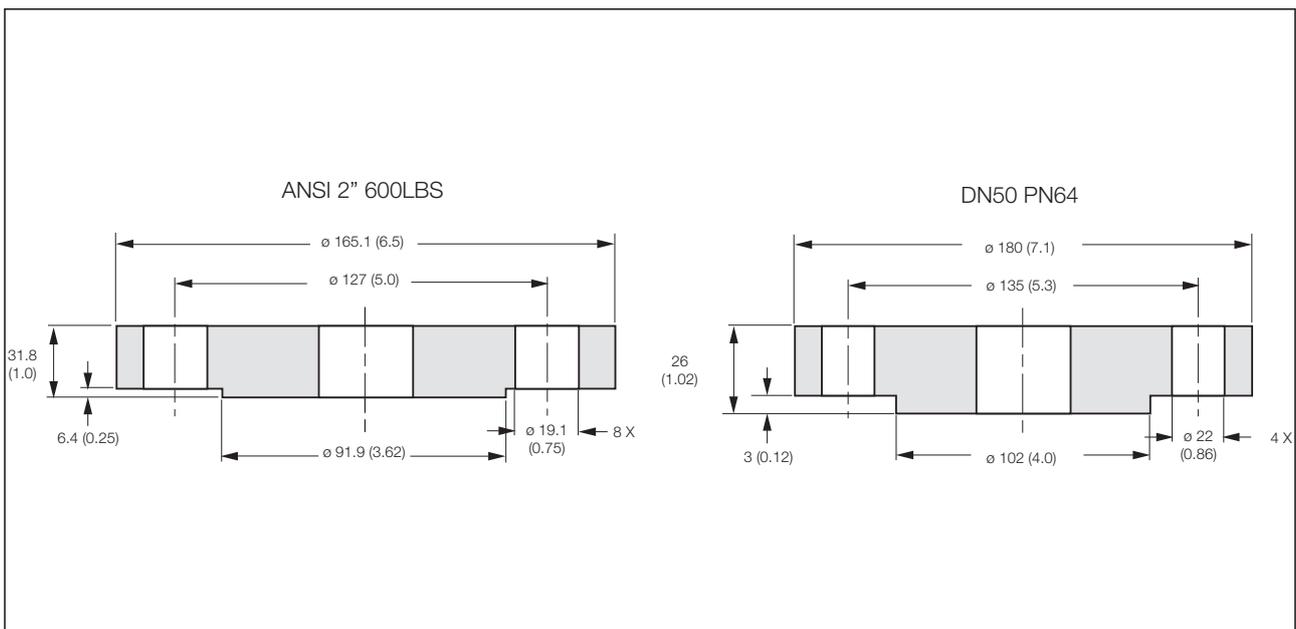
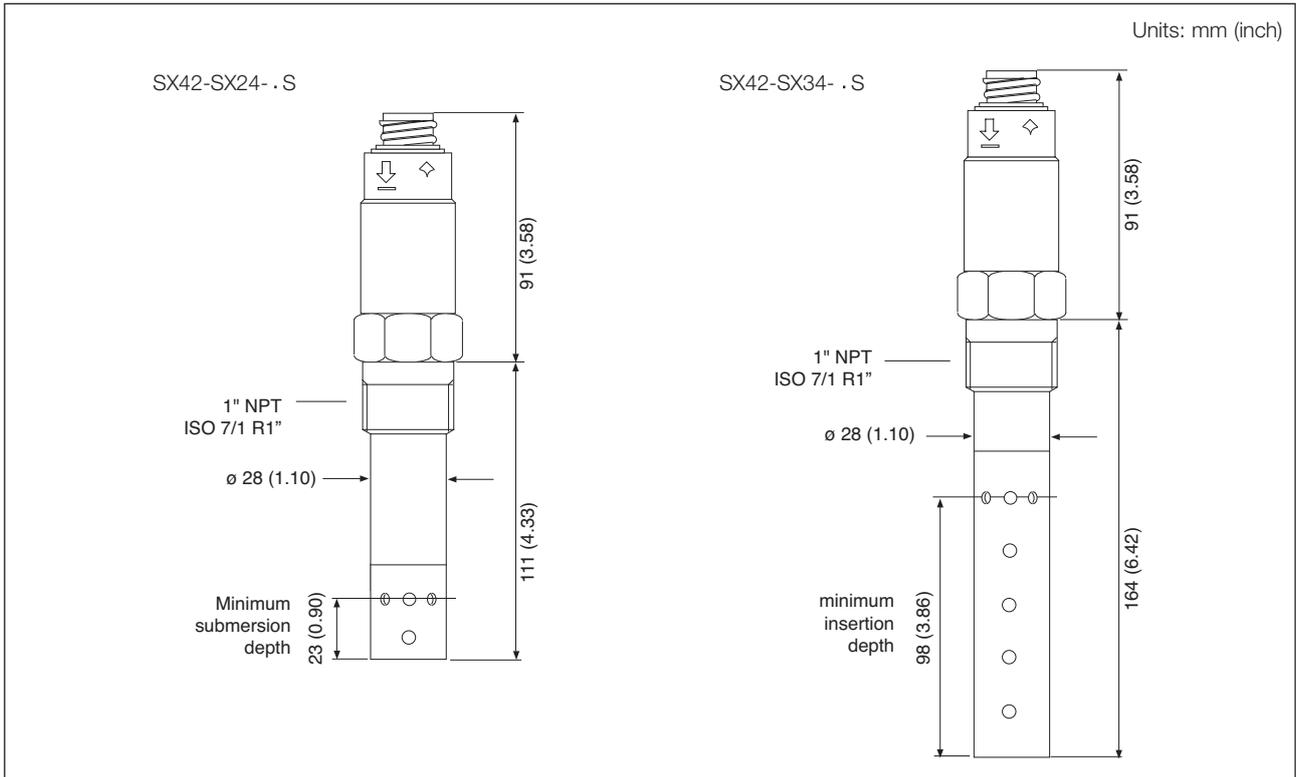
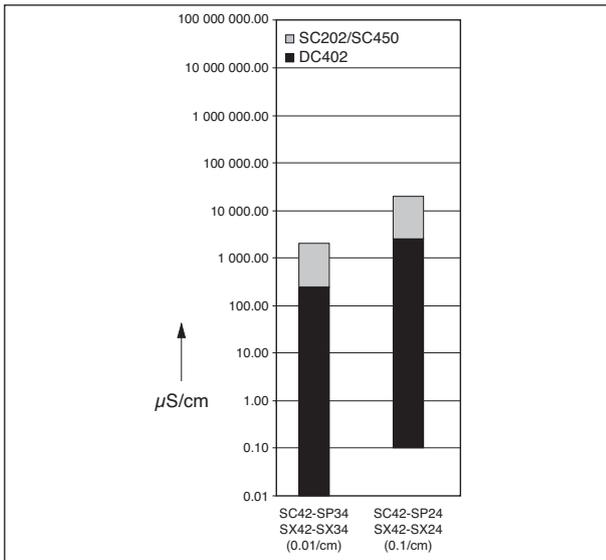


Figure 5. Flanges



**Figure 6. Threaded models**



**Figure 7. Sensor range**

**YOKOGAWA HEADQUARTERS**  
 9-32, Nakacho 2-chome,  
 Musashinoshi  
 Tokyo 180  
 Japan  
 Tel. (81)-422-52-5535  
 Fax (81)-422-55-1202  
 www.yokogawa.com

**YOKOGAWA CORPORATION OF AMERICA**  
 2 Dart Road  
 Newnan GA 30265  
 United States  
 Tel. (1)-770-253-7000  
 Fax (1)-770-251-2088  
 www.yokogawa.com/us

Yokogawa has an extensive sales and distribution network. Please refer to the European website ([www.yokogawa.com/eu](http://www.yokogawa.com/eu)) to contact your nearest representative.

**YOKOGAWA EUROPE B.V.**  
 Databankweg 20  
 3821 AL AMERSFOORT  
 The Netherlands  
 Tel. +31-33-4641 611  
 Fax +31-33-4641 610  
 www.yokogawa.com/eu

**YOKOGAWA ELECTRIC ASIA Pte. Ltd.**  
 5 Bedok South Road  
 Singapore 469270  
 Singapore  
 Tel. (65)-241-9933  
 Fax (65)-241-2606  
 www.yokogawa.com/sg



**YOKOGAWA** ◆

GS 12D7J3-E-E

Subject to change without notice  
 Copyright©

Printed in The Netherlands, 08-705 (A) I