

General Specifications

Model WU40
Sensor cables

These cables are for use with the Yokogawa conductivity cells fitted with a cable connector. The plug/socket connection between cell and cable meets the requirements of IP65.


The connector of the cable has a secure screw connection with simple wiring mode. The gilded contacts ensure good electrical contact to the connector of the conductivity cell.

The cable is six wire multicore and covered with a thermoplastic PVC. The wires are also covered with thermoplastic PVC individually and coloured.


The cable connections are supplied with 2 mm contact pins for connection to the transmitter, preamplifier or connection box: these pins guarantee a correct and simple connection to the terminals.




System Configuration




Sensors




Cables



Fittings



Transmitters





Accessories

Technical Specifications

Cable length	: 1, 2, 5 1/2, 10, 15, 20 or 25 m
Temperature range	: -10 °C to +80 °C
Wire resistances	: approx. 18.10 ⁻³ Ω/m
Capacity core/core/screen	: max. 130 pF/m
Isolation resistance between cores and screen	: approx. 10 ⁹ Ω/m (20 °C)
Connector contact resistance	: < 8 mΩ

Model and Suffix Codes

Model	Suffix Code	Description
WU40		Sensor cable
Cable length	-LH01	1 meter
	-LH02	2 meter
	-LH05	5,5 meter
	-LH10	10 meter
	-LH15	15 meter
	-LH20	20 meter
	-LH25	25 meter

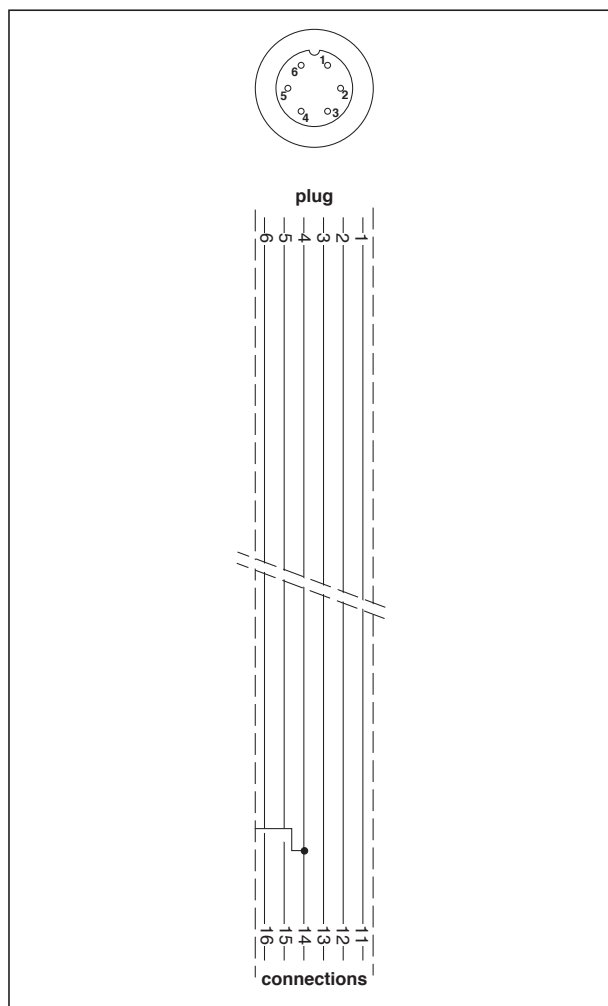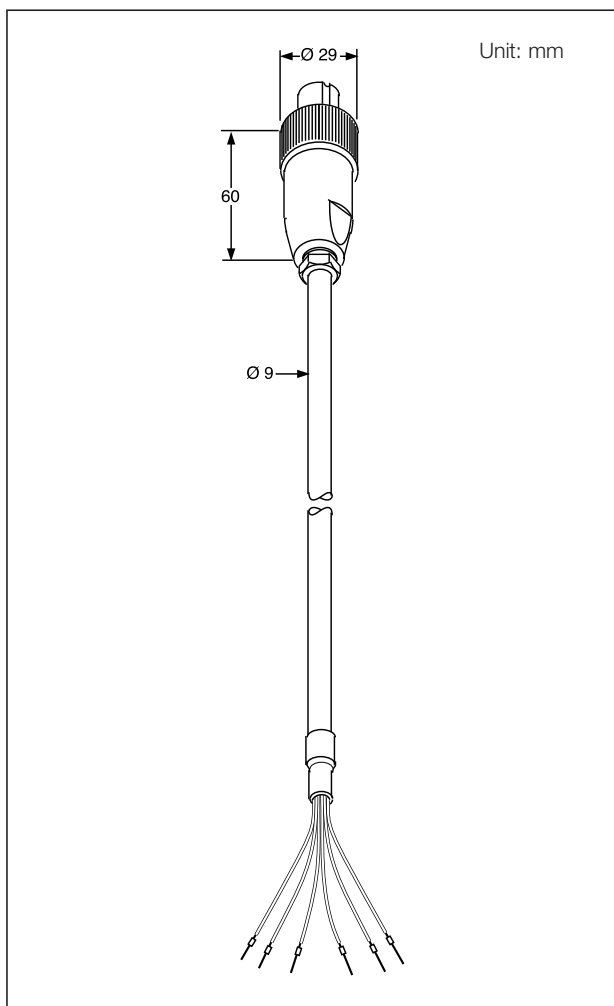

Dimensions

Internal Wiring

YOKOGAWA HEADQUARTERS
 9-32, Nakacho 2-chome,
 Musashinoshi
 Tokyo 180
 Japan
 Tel. (81)-422-52-5535
 Fax (81)-422-55-1202
 E-mail: webinfo@mls.yokogawa.co.jp
 www.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA
 2 Dart Road
 Newnan GA 30265
 United States
 Tel. (1)-770-253-7000
 Fax (1)-770-251-2088
 E-mail: info@yca.com
 www.yokogawa.com/us

YOKOGAWA EUROPE B.V.
 Databankweg 20
 3821 AL AMERSFOORT
 The Netherlands
 Tel. +31-33-4641 611
 Fax +31-33-4641 610
 E-mail: info@nl.yokogawa.com
 www.yokogawa.com/eu

YOKOGAWA ELECTRIC ASIA Pte. Ltd.
 5 Bedok South Road
 Singapore 469270
 Singapore
 Tel. (65)-241-9933
 Fax (65)-241-2606
 E-mail: webinfo@yas.com.sg
 www.yokogawa.com/sg

Yokogawa has an extensive sales and distribution network. Please refer to the European website (www.yokogawa.com/eu) to contact your nearest representative.



YOKOGAWA ◆

GS 12D7W1-E-E

Subject to change without notice

Copyright©

Printed in The Netherlands, 05-412 (A) I